

MOUNTING REFERENCE GUIDE

Monitoring and PDMS Mounting Solutions for Dräger Atlan® A350

CIM Cable Integrated Mounting System





Content

General notes	3
Product highlights	4
How to create part numbers	5
Load capacity support arm and monitor adaptation	
Monitor mount	
Extended pivot arm heavy load	9
Height adjustable arm	11
Extended height adjustable arm	13
Bracket and keyboard tray	
Extended pivot arm heavy load with W-bracket	15
Extended height adjustable arm with W-bracket	17
Counter top	19





General notes

Product safety

CIM med® medical mounting solutions for anaesthesia machines are designed and tested to the most exacting of standards, are CE marked and adhere to the regulations (EU) 2017/745 (MDR). EN 60601-1 compliancy forms the basis of everything we do, to ensure that you and your customer get the safest, most beneficial solutions available in the world today.

Each arm is earthed back to the carts own earthing system. The arms can be restricted in movements to protect elements of the cart like rotameters, screens and cylinder manifolds. This also helps tip test conformity.

We have taken the time and effort to carry out all other testing such as static and dynamic load testing in combination with your anaesthesia cart. This is an essential part of medical compliance. We consider it our responsibility to ensure that the CIM configuration offered in this mounting reference guide, is tested, stable and safe. We will never supply you with a solution that is not 100% compliant. It is important that the maximum load carrying capacity for the anaesthesia machine as stated by the manufacturer, is not exceeded when using multiple configurations.

Please ask for a variety of TÜV-tested mounting solutions for anaesthesia applications. A declaration of conformity as well as the TÜV report can be provided on request: enquiry@cim-med.com

Mounting positions

Monitoring and PDMS can be mounted on the left and on the right side of the Atlan® A350. Available configurations and possible loading can be different when a counterweight is mounted or not.

Product marking

MD A stand-alone product that is already classified as a medical product class 1 before being integrated into an overall medical device. The product is CE-marked. A declaration of conformity is available.

Accessories or spare parts that have no independent function and are therefore not subject to the MDR. These products are not CE-marked. A declaration of conformity is not required.

Warranty

All CIM products have a 5-year warranty to be free of defects in material and fuctionality from the date of delivery.



Product highlights

Non-height adjustable arm

Pivot and extended pivot arms offer full cable integration and easy cleaning for infection control in all critical care areas in the clinical environment. Our 5-years warranty guarantees reliable, trouble-free and maintenance-free operation. The swivel function at the fixing point as well as the tilt/swivel function of the monitor adaptation offers optimum positioning of your device. The extended pivot arm is a two-part arm with central pivot point between the two arm sections. All bottommounted monitors have the safety feature of a 20° tilt stop.

Height adjustable arm

The height adjustable arm offers **full cable integration**, one-wipe clean surfaces and our **5-year warranty** on the entirety of the product. Vertically and horizontally adjustable, the arm offers optimal positioning of your device. A constant viewing angle when vertically adjusted is guaranteed by a parallel linkage. **Weight-optimized springs counter-balance** the monitor without making any adjustments. All bottom-mounted monitors have the safety feature of a **20° tilt stop**. Individual rotational stops may be integrated in any joint.

To provide the perfect combination of arm and monitor, the CIM articulated height adjustable arm has a simple quarter-turn lock to hold the arm safely in position when removing the monitor. Furthermore the arm is equipped with the unique safety feature of a slow-release gas spring. Should anybody try to remove the monitor before locking the arm in position, the arm will only rise at a slow and even tempo.







How to create part numbers

1. Choose the arm version required:

H33013 = extended pivot arm heavy duty

431 = height adjustable arm

73113 = extended height adjustable arm



A = 5" plunge plate G = VESA 75/100

PH = Philips table top mount

RR = infusion pump mount (only with H33013)

3. Choose the version of your anaesthesia device and choose the mounting side (Y):

4S-01L = Dräger Atlan A350® with counterweight, left side

4S-01R = Dräger Atlan A350® with counterweight, right side 4S-02L = Dräger Atlan A350® without counterweight, left side

4S-02R = Dräger Atlan A350® without counterweight, right side

4. Choose the colour requested for decorative parts (C):

gr = RAL 7024 (graphite grey)

bl = RAL 5013 (cobalt blue)

5. Colour of the aluminium die-cast parts:

1 = RAL 9016 (traffic white)

6. Specify the spring depending on the weight of your monitor/ device - only with height adjustable arms (X):

60 = 2 - 5 kg / 4.4 - 11 lbs

95 = 4 - 9 kg / 8.8 - 19.8 lbs

= 4.5 - 9 kg / 9.9 - 19.8 lbs

130 = 7.5 - 9 kg / 16.5 - 19.8 lbs

Example

Grounding		01 + 02 Arm version + Monitor adaption		03 Mounting side	04 + 05 Colour		06 Spring tension
DR	-	431A	_	Υ	C1	_	X
DR	_	431A	_	4S-01L	bl1	_	95







How to create part numbers

1. Choose the arm version required:

H33013F = extended pivot arm heavy duty with W-bracket 73113F = extended height adjustable arm with W-bracket

2. Choose the version of your anaesthesia device and choose the mounting side (Y):

4S-01L = Dräger Atlan A350® with counterweight, left side

4S-01R = Dräger Atlan A350® with counterweight, right side

4S-02L = Dräger Atlan A350® without counterweight, left side

4S-02R = Dräger Atlan A350® without counterweight, right side

3. Choose the colour requested for decorative parts (C):

gr = RAL 7024 (graphite grey) bl = RAL 5013 (cobalt blue)

4. Colour of the aluminium die-cast parts:

1 = RAL 9016 (traffic white)

5. Specify the spring depending on the weight of your monitor/ device - only with height adjustable arms (X):

95 = 2.5 - 5.5 kg / 5.5 - 12.1 lbs

6. Specify the requested size of the keyboard tray (T):

300 x 210 mm / 11.8 x 8.3" 40 = 400 x 150 mm / 15.7 x 5.9" 50 = 500 x 200 mm / 19.7 x 7.9" 58 = 580 x 200 mm / 22.8 x 7.9"

Example

Grounding		01 Arm version		02 Mounting side	03 + 04 Colour		05 Spring tension		06 Keyboard tray
DR	_	431F	_	Υ	C 1	_	X	_	Т
DR	_	431F	_	4S-01R	bl1	_	95	_	30





Load capacity support arm and monitor adaptation

	5" PLUNGE PLATE	VESA 75/100	PHILIPS TABLE TOP Mount	INFUSION PUMP Mount
		0:50		0 0
ATLAN® A350 WITH COUNTERWEIGHT	- LEFT AND RIGHT SIDE			
Arm version	H33013A	H33013G	Н33013РН	H33013RR
Max. load capacity support arm	10.5 kg / 23.1 lbs	10.5 kg / 23.1 lbs	10.5 kg / 23.1 lbs	13.0 kg / 28.7 lbs
Max. load monitor adaptation	10.5 kg / 23.1 lbs	10.5 kg / 23.1 lbs	10.5 kg / 23.1 lbs	
Product weight	3.3 kg / 7.3 lbs	3.4 kg / 7.5 lbs	3.2 kg / 7.1 lbs	2.8 kg / 6.2 lbs
Arm version	431A	431G	431PH	
Max. load capacity support arm	9.0 kg / 19.8 lbs	9.0 kg / 19.8 lbs	9.0 kg / 19.8 lbs	
Max. load monitor adaptation	9.0 kg / 19.8 lbs	9.0 kg / 19.8 lbs	9.0 kg / 19.8 lbs	
Product weight	4.4 kg / 9.8 lbs	4.3 kg / 9.5 lbs	4.3 kg / 9.5 lbs	
Arm version	73113A	73113G	73113PH	
Max. load capacity support arm	7.0 kg / 15.4 lbs	7.0 kg / 15.4 lbs	7.0 kg / 15.4 lbs	
Max. load monitor adaptation	7.0 kg / 15.4 lbs	7.0 kg / 15.4 lbs	7.0 kg / 15.4 lbs	
Product weight	5.2 kg / 11.5 lbs	5.1 kg / 11.3 lbs	5.0 kg / 11.0 lbs	
ATLAN® A350 WITHOUT COUNTERWEIG	GHT - LEFT AND RIGHT SIDE			
Arm version	H33013A	H33013G	H33013PH	H33013RR
Max. load capacity support arm	7.5 kg / 16.5 lbs	7.5 kg / 16.5 lbs	7.5 kg / 16.5 lbs	9.5 kg / 20.9 lbs
Max. load monitor adaptation	7.5 kg / 16.5 lbs	7.5 kg / 16.5 lbs	7.5 kg / 16.5 lbs	
Product weight	3.3 kg / 7.3 lbs	3.4 kg / 7.5 lbs	3.4 kg / 7.5 lbs	2.8 kg / 6.2 lbs
Arm version	431A	431G	431PH	
Max. load capacity support arm	6.0 kg / 13.2 lbs	6.0 kg / 13.2 lbs	6.0 kg / 13.2 lbs	
Max. load monitor adaptation	6.0 kg / 13.2 lbs	6.0 kg / 13.2 lbs	6.0 kg / 13.2 lbs	
Product weight	4.4 kg / 9.8 lbs	4.3 kg / 9.5 lbs	4.3 kg / 9.5 lbs	



Load capacity support arm and monitor adaptation

	W-BRACKET	W-BRACKET		
ATLAN® A350 WITH COUNTERWEIGHT - L	EFT AND RIGHT SIDE			
Arm version Max. load capacity support arm Max. load monitor adaptation Product weight *	H33013F 10.0 kg / 22.0 lbs 10.0 kg / 22.0 lbs 5.0 - 5.4 kg / 11.0 - 11.9 lbs	73113F 5.5 kg / 12.1 lbs 5.5 kg / 12.1 lbs 6.7 - 7.1 kg / 14.8 - 15.7 lbs		
ATLAN® A350 WITHOUT COUNTERWEIGH	T - LEFT AND RIGHT SIDE			
Arm version Max. load capacity support arm Max. load monitor adaptation Product weight *	H33013F 6.0 kg / 13.2 lbs 6.0 kg / 13.2 lbs 5.0 - 5.4 kg / 11.0 - 11.9 lbs			

^{*)} Product weight varies depending on the size of the keyboard tray.

Keyboard with fold-up function available on request. The overall weight capacity of the fold-up version may be less due to the higher weight of the Z-bracket and fold-up keyboard tray.





Extended pivot arm heavy duty

Monitor adaption,

weights & loads see page 7

Mounting side Y see page 5

Colours to choose C decorative parts RAL 5013 cobalt blue / RAL 7024 graphite grey

aluminum parts RAL 9016 traffic white

Part numbers DR-H33013A-Y.C1 5" plunge plate

DR-H33013G-Y.C1 VESA 75/100

DR-H33013PH-Y.C1 Philips table top mount DR-H33013RR-Y.C1 infusion pump mount

NOTE: The arm can be mounted either on the left or right side of the anaesthesia machine.













Extended pivot arm heavy duty

Technical data

FRONT VIEW

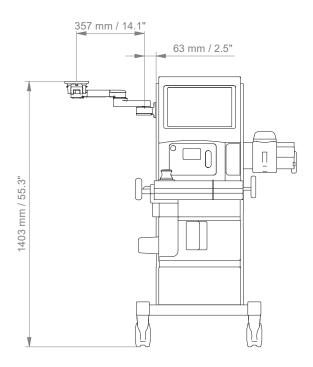

TOP VIEW





Height adjustable arm

Monitor adaption,

weights & loads see page 7Mounting side Y see page 5

Colours to choose C decorative parts RAL 5013 cobalt blue / RAL 7024 graphite grey

aluminum parts RAL 9016 traffic white

Height adjustment slow-flowing spring, parallel linkage for a constant viewing angle

Balancing range X 600 N (2 - 5 kg / 4.4 - 11 lbs); 950 N (4 - 9 kg / 8.8 - 19.8 lbs);

1100 N (4.5 - 9 kg / 9.9 - 19.8 lbs); 1300 N (7.5 - 9 kg / 16.5 - 19.8 lbs)

Part numbers DR-431A-Y.C1_X 5" plunge plate

DR-431G-Y.C1_X VESA 75/100

DR-431PH-Y.C1_X Philips table top mount

NOTE: The arm can be mounted either on the left or right side of the anaesthesia machine.













Height adjustable arm

Technical data

FRONT VIEW

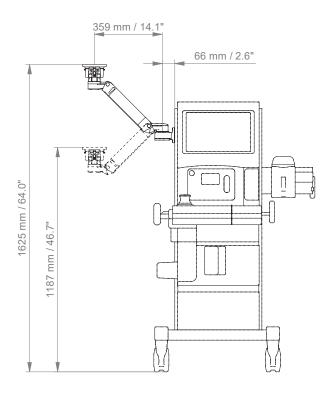

TOP VIEW







Extended height adjustable arm

see page 5

Monitor adaption,

Mounting side Y

weights & loads see page 7

Colours to choose C decorative parts RAL 5013 cobalt blue / RAL 7024 graphite grey

aluminum parts RAL 9016 traffic white

Height adjustment slow-flowing spring, parallel linkage for a constant viewing angle

Balancing range X 600 N (2 - 5 kg / 4.4 - 11 lbs); 950 N (4 - 7 kg / 8.8 - 15.4 lbs)


Part numbers DR-73113A-Y.C1_X 5" plunge plate

DR-73113G-Y.C1_X VESA 75/100

DR-73113PH-Y.C1_X Philips table top mount

NOTE: The arm can be mounted either on the left or right side of the anaesthesia machine.

A counter weight is required for the Atlan A350 to ensure that the overall configuration is safe.

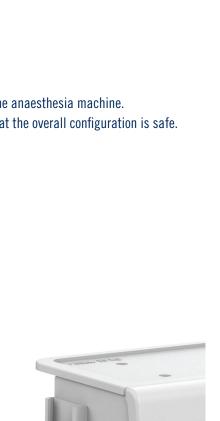

MD







Extended height adjustable arm

Technical data

FRONT VIEW

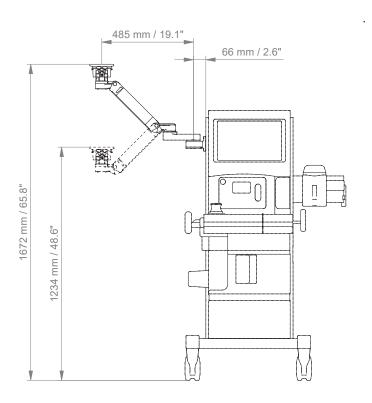

TOP VIEW







Extended pivot arm heavy duty with W-bracket

Monitor/ keyboard adaption W-bracket VESA 75/100 and keyboard / mouse tray

bracket with keyboard fold-up funktion on request

Weights & loads see page 8

Mounting side Y see page 6

Colours to choose decorative parts RAL 5013 cobalt blue / RAL 7024 graphite grey

aluminum parts RAL 9016 traffic white

Keyboard tray dimension T 300 x 210 mm, 400 x 150 mm, 500 x 200 mm, 580 x 200 mm

11.8 x 8.3", 15.7 x 5.9", 19.7 x 7.9", 22.8 x 7.9"

Part number DR-H33013F-Y.C1_T

NOTE: The arm can be mounted either on the left or right side of the anaesthesia machine.












Bracket and keyboard tray


Extended pivot arm heavy duty with W-bracket

Technical data

FRONT VIEW

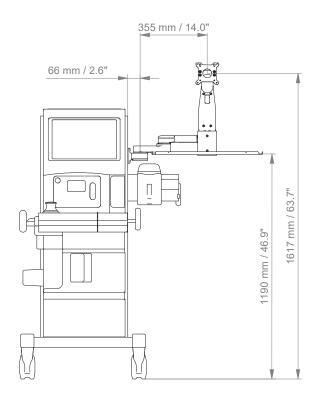

TOP VIEW







Extended height adjustable arm with W-bracket

W-bracket VESA 75/100 and keyboard / mouse tray Monitor/ keyboard adaption

bracket with keyboard fold-up funktion on request

Weights & loads see page 8

Mounting side Y see page 6

Colours to choose C decorative parts RAL 5013 cobalt blue / RAL 7024 graphite grey

aluminum parts RAL 9016 traffic white

Balancing range X 950 N (2.5 - 5.5 kg / 5.5 - 12.1 lbs)

Keyboard tray dimension T 300 x 210 mm, 400 x 150 mm, 500 x 200 mm, 580 x 200 mm

11.8 x 8.3", 15.7 x 5.9", 19.7 x 7.9", 22.8 x 7.9"

Part number DR-73113F-Y.C1_X_T

NOTE: The arm can be mounted either on the left or right side of the anaesthesia machine.

A counter weight is required for the Atlan A350 to ensure that the overall configuration is safe.












Bracket and keyboard tray


Extended height adjustable arm with W-bracket

Technical data

FRONT VIEW

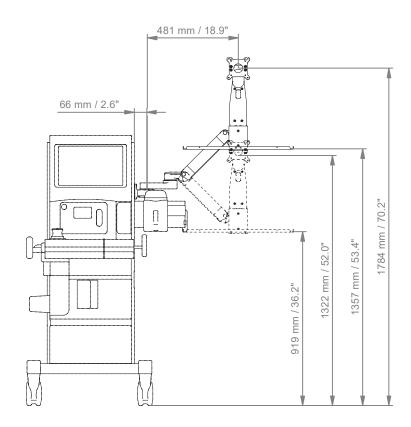

TOP VIEW







Counter top

Colours to choose C decorative parts RAL 5013 cobalt blue / RAL 7024 graphite grey

aluminum parts RAL 9016 traffic white

Part numbers DR-HA-ATL.C1_50 5" plunge plate

DR-HPH-ATL.C1_50 Philips table top mount





Illustration shown with 5" plunge plate








Top: Monitor mount


Counter top

Technical data

FRONT VIEW



TOP VIEW





CIM med GmbH

Euro-Industriepark Margot-Kalinke-Str. 9 80939 Munich / Germany

T +49 89. 978 94 08-0

CIM med Inc.

University Executive Park 301 McCullough Drive, Suite 400 Charlotte NC, 28262 / USA

T +1 704 221 0721

info@cim-med.com www.cim-med.com

